

# PNN-R-16 RECEIVER



## PNN-R-16

Small, compact and robust- type of protection: IP67.

Suitable for installation in restricted spaces.


Application specific molding technique possible - specially developed for vibrating environment.

External antenna.

Integrated quick charger for batteries  
1000mAh - charging in about 1 hour.

RS485 interface for analysis and update possibilities.

RS232 interface optional.

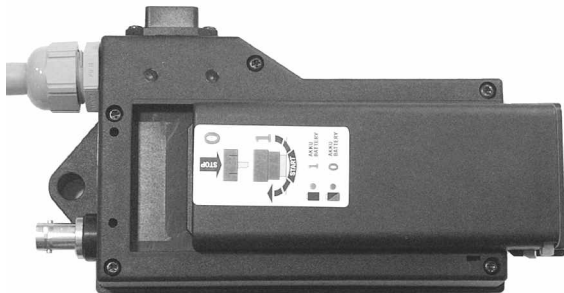

## PNN-R-16

Supply voltage 5V - 40VDC

16 CMOS on/off outputs <3A (higher on demand)

or non-regulated PWM outputs

