




## Installation options

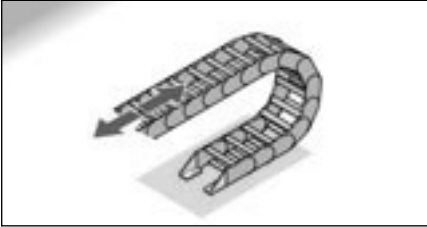

**1.**

**Horizontal, self-supporting**



**2.**

**Horizontal, gliding**



**3.**


**Horizontal, self-supporting, projecting with support**



**4.**


**Horizontal, circular movement**

Version with reverse bend radius

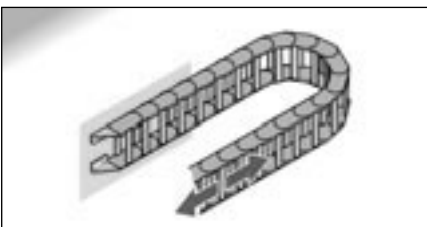


**5.**

**Horizontal, side-mounted, (rotated 90°)**

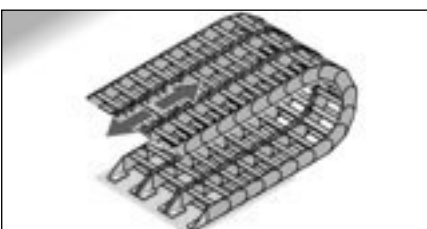

**6.**


**Horizontal, side by side**

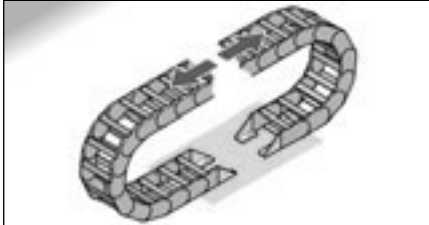

**7.** Horizontal, contradirectional



**8.** Vertical, upright

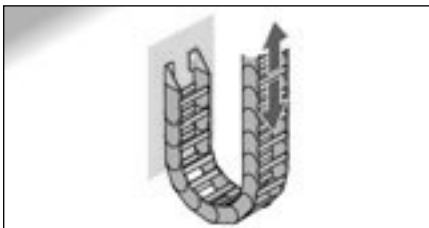


**9.** Vertical, hanging



**10.** Combined horizontal and vertical

## Lowered moving end

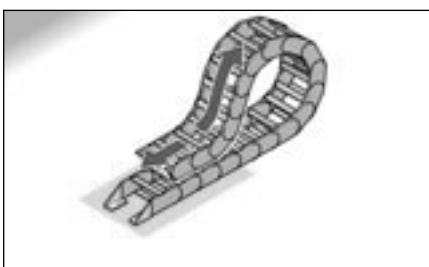

With longer travel distances it may be advisable in some cases to lower the height of the moving attachment point.

Please consult our engineers.

In such cases changes to the chain layout should be noted (e.g. extension of chain and guide channel).